


NP3TT-P

0.173" (4.4 mm) BANTAM-TYPE MINIATURE PLUGS


Assembly Instructions

figure 1

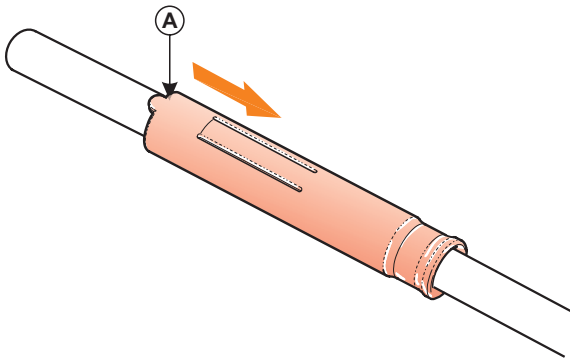


First slide the plug's plastic cover onto the cable as shown in figure 1. Pay close attention that the cover's locking tooth labelled A faces the end of the cable, where the plug will be connected.

figure 2

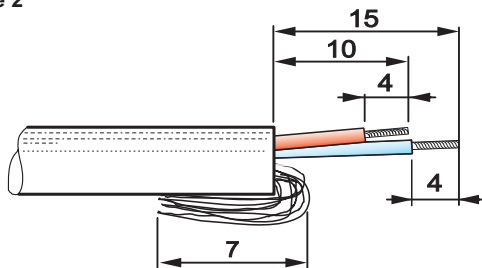


Prepare the cable by stripping away 15 mm of the outer cable jacket. Reduce the shielding strands to a length of 7 mm and bend them over the jacket. Shorten the wire, which will connect to the tip, to a length of 10 mm. Strip away 4 mm of the jacketing of each wire as indicated in figure 2.

figure 3

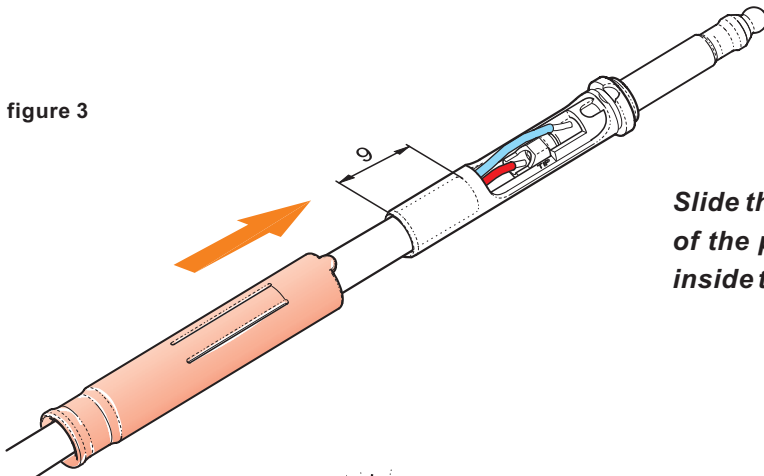


Slide the prepared end of the cable into the open end of the plug, so that 9 mm of unstripped cable rests inside the plug behind the prepared end.

figure 4

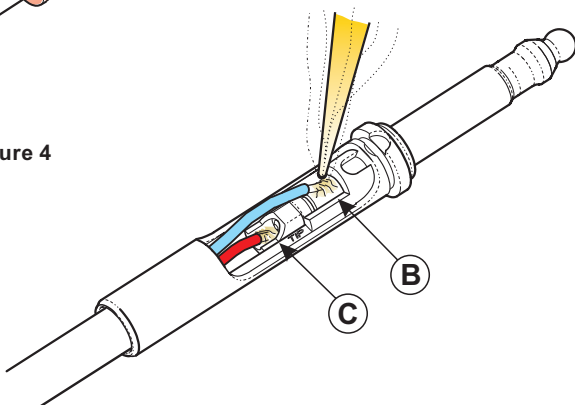

Heat the ring terminal labelled B with a soldering bit, then position the longer wire on the heated terminal and allow solder to melt affixing the wire to the terminal. Repeat the process with the tip terminal labelled C in figure 4 with the shorter wire.



figure 5

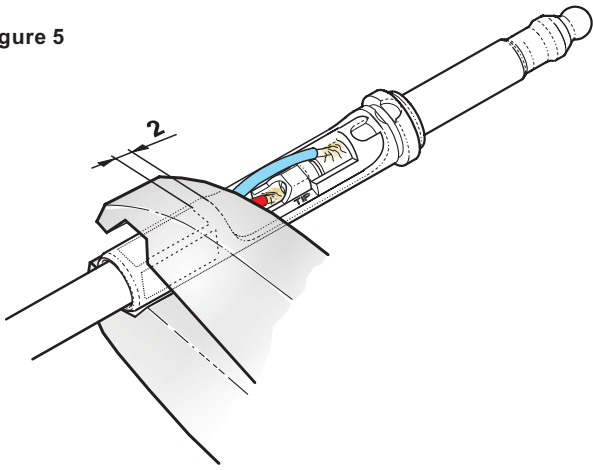

Next crimp the end of the plug containing the cable with a standard 5.41 mm hexagonal crimping Tool (RG 58).

Crimp only in the area designated in figure 5!


figure 6

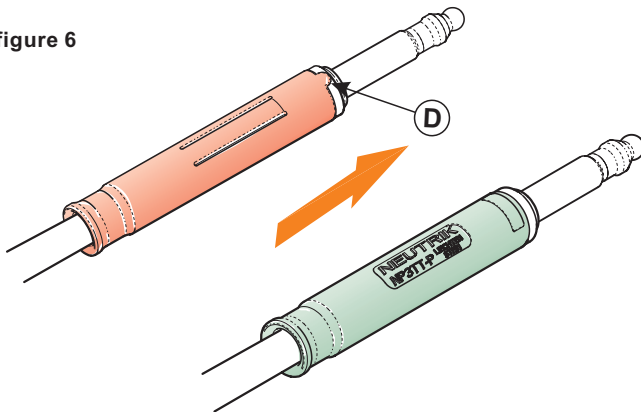

Finish the installation sliding the cover over the plug, so that the cover's locking tooth rests in the plug's notch labelled (D) displayed in figure 6.


Disassembly:

figure 1

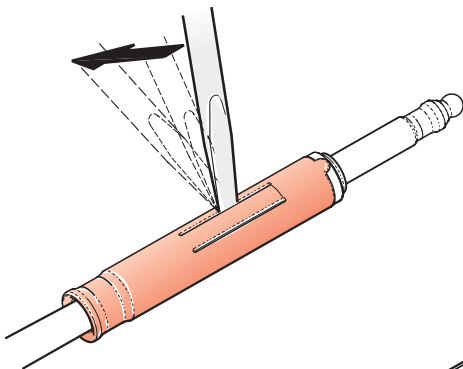

Position a screw driver into one of the two tiny slots as shown in figure 1 and bend out the plastic snap.

figure 2

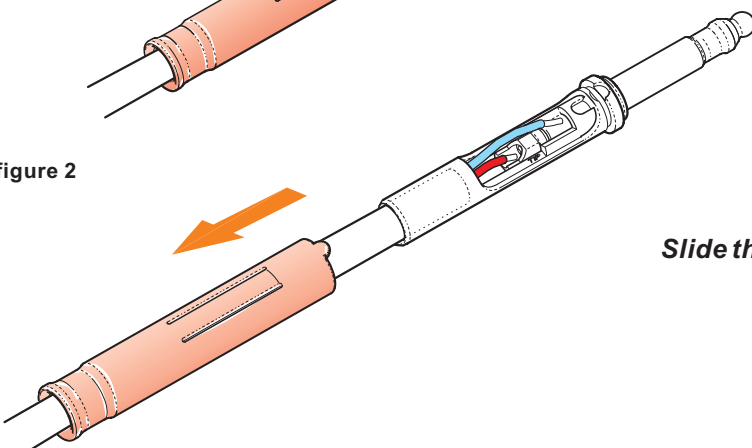

Slide the plastic cover from the connector.

NEUTRIK AG
Liechtenstein
Tel.: +423/237 24 24
Fax: +423/232 53 93
www.neutrik.com

NEUTRIK Zürich AG
Switzerland
Tel.: +41 1/736 5010
Fax: +41 1/736 5011

NEUTRIK (UK) Ltd.
Great Britain
Tel.: +44 1983/811 441
Fax: +44 1983/811 439

NEUTRIK USA INC.
USA
Tel.: +1 732/901 9488
Fax: +1 732/901 9608

NEUTRIK Tokyo Ltd.
Japan
Tel.: +81 3/3663 4733
Fax: +81 3/3663 4796

NEUTRIK France
France
Tel.: +33 1/4131 6750
Fax: +33 1/4131 0511

NEUTRIK Vertriebs GmbH
Germany / Netherlands
Tel.: +49 8131/28 08 90
Fax: +49 8131/28 08-30

Draft. Nr.: BDA 034 / 3102M0531
Update: 21.10. 2003



NEUTRIK
CONNECTING THE WORLD

Data subject to change without prior notice. ©2003 NEUTRIK®. ALL RIGHTS RESERVED.